

Removing the lens for cleaning or replacement:

Push down here with one finger...



While pushing here with another finger

You should hear and/or feel a "click", indicating the spade has been released



Carefully pivot the lens holder away from the camera housing




Now you can pull the tab out of its socket



Separate the glass lens and plastic lens retainer from the lens holder



Reassemble in this order. The rubber gasket presses against the lens

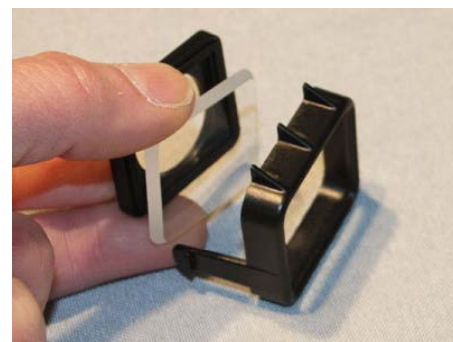

You can reassemble the parts loosely



Then press them into place



Insert the lens holder's flat tab into its socket on the housing



Guide the spade into its slot



Push in firmly til it clicks into place



1305 N H St
STE A114
Lompoc, CA 93436
sales@funjump.com